

LIGHTPIPE LED EXIT & EMERGENCY COMBO

Illumination:

- Ultra-bright, energy efficient white LED emergency lighting
- 4.5 W (36 LEDs x 0.125 watts) per light pipe
- High-performance smooth-chrome-plated metallized reflector and polycarbonate "light pipe" lens for optimal light distribution and resistance to discoloration
- Adjustable light pipe allows for optimal use of light output
- Long-lasting, energy efficient LED
- Available with red or green lens



Electrical:

- Dual 120/277 VAC
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Remote capable standard
- 4.8V maintenance-free, rechargeable Ni-Cad battery (4NICDC)
- Internal solid-state transfer switch automatically connects the internal battery to LED board/light pipe for minimum 90-minute emergency illumination
- Solid-state, two-rate charger recharges battery in 24

Mounting:

- EZ-snap universal mounting canopy provides top, end mount (5½" x 4⅜")
- Universal knockout pattern on back plate for wall mount

Housing:


- Injection-molded, engineering-grade, 5VA flame retardant, high-impact thermoplastic in white finish
- EZ-snap out chevron directional indicators
- Available in white or black housing

Warranty/Listing:

- Five year warranty on all electronics and housing
- UL listed in accordance with UL924
- UL listed for damp locations (32°F – 122°F)



Dimensions:

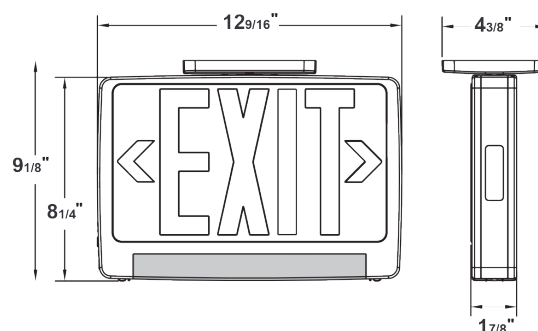

Available with Self Diagnostics (SDT) feature

P/N	DESCRIPTION
LED10	Exit & Emergency Combo - Lightpipe LED, White Housing, Red Lens w/Battery Back-Up
LED10G	Exit & Emergency Combo - Lightpipe LED, White Housing, Green Lens w/Battery Back-Up
LED10B	Exit & Emergency Combo - Lightpipe LED, Black Housing, Red Lens w/Battery Back-Up
LED10SDT	Exit & Emergency Combo - Lightpipe LED, Self-Diagnostics Testing, White Housing, Red Lens w/Battery Back-Up



Heiser Logistics • 35 North Street, Suite 50 • Canandaigua, NY 14424
Telephone: 800.828.9638 • Fax: 800.782.2937 • Email: sales@heiserusa.com
www.heiserusa.com