


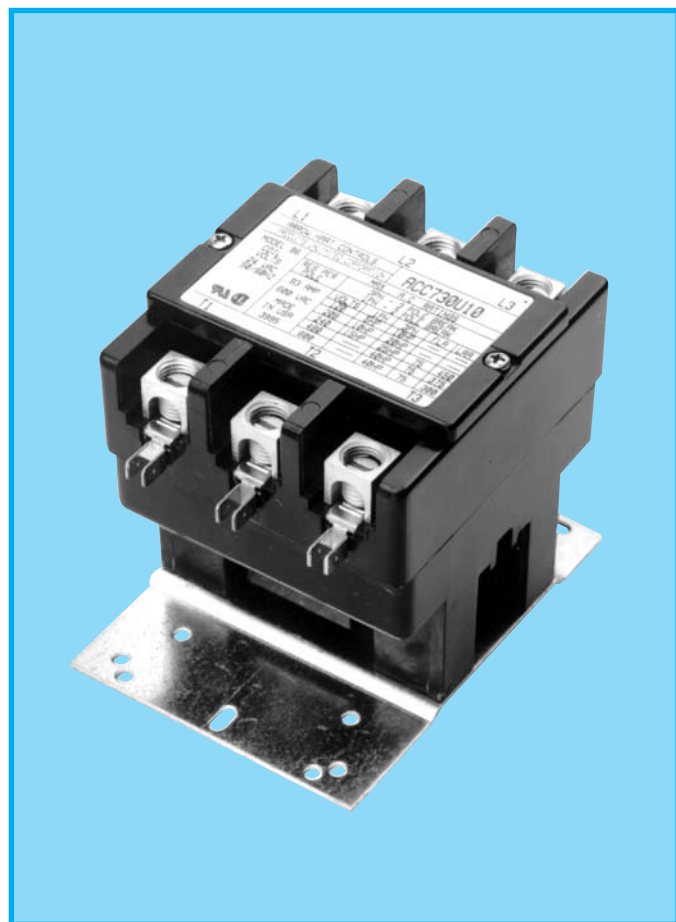

75-120 amp 3 pole power contactors

model 86 75-90 amp contactors

The 90 amp model has been downsized to fit the 75 amp base plate, and now both the 75 and the 90 amp feature molded encapsulated coils. These heavy-duty contactors are ideal for high amperage applications in the HVAC and other industries.

model A 120 amp contactor

Old reliables, they've been called, and reliable they are. These extra heavy duty contactors just deliver performance year after year.

specifications:

- Line & load terminations: Box lugs
- Wire size AWG, min/max:
14-1/0 CU/AL on 86, 14-2 CU/AL on model 93
4/0-2 CU/AL 120 amp model A
- Tightening Torque: 75-90 amp; 50 in. lb.
120 amp; 100 in. lb.
- Quick connects: double .250 standard
- Coil termination: 6-32 screw and single QC
- Permissible ambient temperature:
operate +60C/-40C storage +90C/-50C
- Contact material: silver cadmium oxide
- Approximate mechanical life cycles:
1,000,000; 75-90 amp 500,000; 120 amp
- Dimensions & Accessories: pages C-23 - C-28

U.L. 508 GUIDE NO. NLDX2 / FILE NO. E75492
C.S.A. C22.2 NO. 14 / FILE NO. LR49598 or LR47771

3 pole power contactors

MARS NO.	AH MODEL	COIL VOLTS 50/60 HZ (1)	NO. OF POLES	FLA 600V	LOCKED ROTOR AMPS			RES AMPS PER POLE 600V	LINE / LOAD VOLTS	MAX. HP	
					240	480	600V			1 PH	3 PH
60353	ACC720U40	277	3	75	450	375	300	93	240	15	40
60235	ACC730U10	24									
60236	ACC730U20	110-120							110-120	5	20
60237	ACC730U30	208-240	3	75	450	375	300	93	200-240	10	25
60238	ACC730U50	277							240	15	40
60239	ACC730U60	480							480-600	—	
60245	ACC937U10	24									
60246	ACC937U20	110-120							110-120	7.5	25
60247	ACC937U30	208-240	3	90	540	450	360	120	200-240	15	30
60248	ACC937U50	277							240	20	50
60249	ACC937U60	480							480-600	—	
60360*	ACC1220U10	24	2	120	720	600	480	150	110-120	20	—
60362	ACC1220U30	208-240								40	75
60255	ACC1230U10	24									
60256	ACC1230U20	110-120							110-120	20	—
60257	ACC1230U30	208-240	3	120	720	600	480	150	200-208	30	75
60258	ACC1230U50	277							240	40	75
60259	ACC1230U60	480							480-600		75

*Limited quantities available, while supplies last

(1) Nominal rated voltage at 50 Hz are 110V for U20 & 220V for U30.